



# VDM2DP12H36CL

MICRO DOME, DAY/NIGHT CAMERA, 520 TVL,  
3.6MM LENS, IR LEDS, 12VDC

## KEY FEATURES

- Chrome aluminium casing
- Indoor/outdoor use, built to IP66
- Flush mount, surface mount with the optional adapters
- Software Day/Night camera with 3.6mm fixed lens
- 0.0 Lux @ F1.2 with IR Leds ON
- IR distance: up to 7m
- Resolution: 520 TVL
- Operates on 12VDC
- Certified compliant to the e11 type approval to Directive 72/245/EEC for use on motor vehicles



Suitable for indoor and outdoor use, our micro domes feature an aluminium housing built to IP66. The camera module is fitted on a 3-axis gimbal allowing easy positioning and comes with a 3.6mm lens. It integrates infrared Leds for a round-the-clock surveillance with colour images during the day and black and white images at night.

The VDM2 Series is the ideal solution for mobile applications such as buses, trains, taxis and elevators.


## GENERAL SPECIFICATIONS

Camera	1/3" CCD software day/night
Pixel element	PAL 795 (H) x 596 (V)
Minimum illumination	0.0 Lux @ F1.2 with IR Leds ON
Resolution	520 TVL
Shutter speed	1/50s ~ 1/100 000s
S/N ratio	46 dB (AGC Off)
Gamma compensation	0.45
Sync. system	Internal
Voltage	DC 12V (8 ~ 18V)
Power consumption	2W max.
Certificates	Compliant to the e11 standards, Directive 72/245/EEC for use on motor vehicles

## TEMPERATURE RANGE

Operating temperature	-10°C to 55°C
Storage temperature	-20°C to 70°C

## DIMENSIONS (MM)

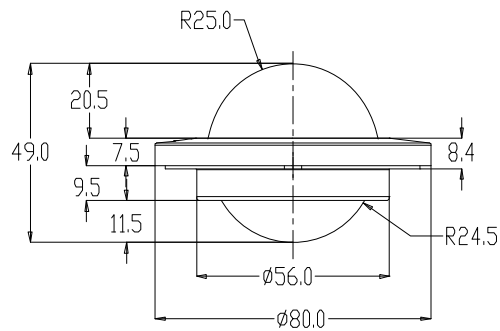

deView Europe  
 Falcon Court, Petre Road  
 Clayton le Moors, Lancashire  
 BB5 5JZ, United Kingdom  
 Phone: +44 (0) 1254 302 490  
 Email: sales@devieweurope.com

Fax: +44 (0) 1254 302 491  
 Web: www.devieweurope.com